

Sensor-switched LED floodlight

LS 150 S

white

EAN 4007841 052553

Article number 052553



LED

30 years (Ø 4,5h / day)

4000 K

4000K neutral white



infrared sensor 240°



max. 12 m



IP44



2 - 1000 lux



10 sec - 15 min



energy saving

3 years

manufacturer's warranty
steinel.de/garantie3y



CE

Function description

Extremely bright, robust and vigilant: the LS 150 S sensor-switched floodlight. On-demand light for illuminating large areas around buildings. Infrared sensor with 240° angle of coverage and 12 m reach. Light output 1486 lm, colour temperature 4000 K, power consumption 14,7 W. Robust aluminium floodlight head. Available in black or white.

Technical specifications

Dimensions (L x W x H)	166 x 155 x 210 mm
Output	14,7 W
Interconnection	No
Lichtstrom Gesamtprodukt	1375 lm
Gesamtprodukt Effizienz	94 lm/W
Colour temperature	4000 K
Colour variation LED	SDCM3
Colour Rendering Index	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
With motion detector	Yes
Detection angle	240 °
Angle of aperture	180 °

Reach, tangential	r = 12 m (302 m ²)
Time setting	10 s – 15 Min.
Main light adjustable	No
Soft light start	No
Impact resistance	IK03
IP-rating	IP44
Ambient temperature	-10 – 40 °C
Housing material	Aluminium
Manufacturer's Warranty	3 years
Einstellungen via: Connect Bluetooth Mesh	Potentiometers
Installation site	wall, corner
Cover material	shrouds
Version	white
PU1, EAN	4007841052553

Accessories

EAN 4007841 630669 Corner wall mount for LS 150 LED

Sensor-switched LED floodlight

LS 150 S


white

EAN 4007841 052553

Article number 052553



Detection Zone

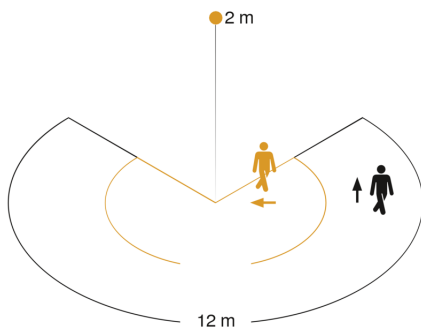

Mögliche Montagehöhe: 1,80 m – 4,00 m

Orange: radial

Schwarz: tangential

Dimension Drawing

